

304 Series™ LED Recessed Canopy Luminaire

Product Specifications

CONSTRUCTION & MATERIALS

- RS Mount luminaire housing is constructed from rugged die cast aluminum and incorporates integral, high performance heatsink fins specifically designed for LED canopy applications
- RD Mount luminaire housing is constructed from rugged die cast aluminum and features high performance extruded aluminum heatsinks specifically designed for LED canopy applications
- LED driver is mounted in a sealed weathertight center chamber that allows for access from below the luminaire
- Field adjustable drive current between 350mA, 525mA and 700mA on Non-IC rated luminaires
- Luminaire housing provided with factory applied foam gasket and provides for a watertight seal between luminaire housing and canopy deck
- Mounts directly to the canopy deck and is secured in place with a die cast aluminum trim frame
- RS mount includes integral junction box which allows ease of installation without need to open luminaire
- Suitable for use in single (RS Mount) or double (RD Mount) skin canopies with 16" (406mm) wide panels
- Designed for canopies of 19-22 gauge (maximum 0.040" [1mm] thickness)
- See 228 Series™ canopy luminaires for canopies using 12" (305mm) deck sections
- Exclusive Colorfast DeltaGuard® finish features an E-Coat epoxy primer with an ultra-durable powder topcoat, providing excellent resistance to corrosion, ultraviolet degradation and abrasion. Black, bronze, silver, and white are available

ELECTRICAL SYSTEM

- **Input Voltage:** 120-277V or 347-480V, 50/60Hz, Class 1 drivers
- **Power Factor:** > 0.9 at full load
- **Total Harmonic Distortion:** < 20% at full load
- Integral weathertight electrical box with terminal strips (12Ga-20Ga) for easy power hookup
- Integral 10kV surge suppression protection standard
- To address inrush current, slow blow fuse or type C/D breaker should be used
- **10V Source Current:** 0.15mA

REGULATORY & VOLUNTARY QUALIFICATIONS

- cULus Listed
- Suitable for wet locations
- Meets FCC Part 15 standards for conducted and radiated emissions
- Enclosure rated IP66 per IEC 60529
- 10kV surge suppression protection tested in accordance with IEEE/ANSI C62.41.2
- Luminaire and finish endurance tested to withstand 5,000 hours of elevated ambient salt fog conditions as defined in ASTM Standard B 117
- DLC qualified when ordered with PS or SL optics and 525 or 700mA drive current. Please refer to www.designlights.org/QPL for most current information
- RoHS Compliant. Consult factory for additional details
- Meets Buy American requirements within ARRA

Electrical Data*							
LED Count (x10)	System Watts 120-480V	Total Current					
		120V	208V	240V	277V	347V	480V
350mA							
04	46	0.39	0.24	0.22	0.21	0.15	0.12
06	69	0.57	0.34	0.30	0.27	0.21	0.16
525mA							
04	71	0.59	0.35	0.31	0.28	0.21	0.16
06	101	0.84	0.49	0.43	0.38	0.30	0.22
700mA							
04	94	0.79	0.46	0.40	0.36	0.28	0.21
06	135	1.14	0.65	0.57	0.50	0.40	0.29

* Electrical data at 25°C (77°F)

Recommended 304 Series™ Lumen Maintenance Factors (LMF) ¹					
Ambient	Initial LMF	25K hr Projected ² LMF	50K hr Projected ² LMF	75K hr Calculated ³ LMF	100K hr Calculated ³ LMF
5°C (41°F)	1.04	0.99	0.97	0.95	0.93
10°C (50°F)	1.03	0.98	0.96	0.94	0.92
15°C (59°F)	1.02	0.97	0.95	0.93	0.91
20°C (68°F)	1.01	0.96	0.94	0.92	0.90
25°C (77°F)	1.00	0.95	0.93	0.91	0.89

¹ Lumen maintenance values at 25°C are calculated per TM-21 based on LM-80 data and in-situ luminaire testing

² In accordance with IESNA TM-21-11, Projected Values represent interpolated value based on time durations that are within six times (6X) the IESNA LM-80-08 total test duration (in hours) for the device under testing (DUT) i.e. the packaged LED chip


³ In accordance with IESNA TM-21-11, Calculated Values represent time durations that exceed six times (6X) the IESNA LM-80-08 total test duration (in hours) for the device under testing (DUT) i.e. the packaged LED chip

304 Series™ LED Recessed Canopy Luminaire


Photometry

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. To obtain an IES file specific to your project consult: <http://lighting.cree.com/products/outdoor/canopy-and-soffit/304-series-1#>

5M



ITL Test Report #: 77285
PKG-304-5M-**-06-E-UL-700-40K
Initial Delivered Lumens: 11,681




CAN-304-5M-**-06-E-UL-700-40K
Mounting Height: 15' (4.6m)
Initial Delivered Lumens: 11,613
Initial FC at grade


Type V Medium Distribution				
LED Count (x10)	4000K		5700K	
	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
350mA				
04	4,600	B3 U1 G1	4,777	B3 U1 G1
06	6,831	B3 U1 G1	7,094	B3 U1 G2
525mA				
04	6,441	B3 U1 G1	6,688	B3 U1 G1
06	9,563	B3 U1 G2	9,931	B3 U1 G2
700mA				
04	7,821	B3 U1 G2	8,122	B3 U1 G2
06	11,613	B4 U1 G2	12,059	B4 U1 G2

* Initial delivered lumens at 25°C (77°F)
** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: www.ies.org/PDF/Erratas/TM-15-11BugRatingsAddendum.pdf

5S



ITL Test Report #: 77876
PKG-304-5S-**-06-E-UL-700-40K
Initial Delivered Lumens: 12,738



CAN-304-5S-**-06-E-UL-700-40K
Mounting Height: 15' (4.6m)
Initial Delivered Lumens: 12,903
Initial FC at grade

Type V Short Distribution				
LED Count (x10)	4000K		5700K	
	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
350mA				
04	5,112	B2 U1 G1	5,308	B2 U1 G1
06	7,590	B3 U1 G1	7,882	B3 U1 G1
525mA				
04	7,156	B3 U1 G1	7,432	B3 U1 G1
06	10,626	B3 U1 G2	11,035	B3 U1 G2
700mA				
04	8,690	B3 U1 G1	9,024	B3 U1 G1
06	12,903	B3 U1 G2	13,399	B4 U1 G2


* Initial delivered lumens at 25°C (77°F)
** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: www.ies.org/PDF/Erratas/TM-15-11BugRatingsAddendum.pdf

304 Series™ LED Recessed Canopy Luminaire


Photometry

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. To obtain an IES file specific to your project consult: <http://lighting.cree.com/products/outdoor/canopy-and-soffit/304-series-1#>

PS



ITL Test Report #: 76940
CAN-304-PS-**-06-E-UL-700-40K
Initial Delivered Lumens: 13,581




CAN-304-PS-**-06-E-UL-700-40K
Mounting Height: 15' (4.6m)
Initial Delivered Lumens: 13,190
Initial FC at grade

Petroleum Symmetric Distribution				
LED Count (x10)	4000K		5700K	
	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
350mA				
04	5,225	B2 U0 G0	5,426	B2 U0 G0
06	7,759	B3 U0 G0	8,057	B3 U0 G0
525mA				
04	7,315	B3 U0 G0	7,597	B3 U0 G0
06	10,862	B3 U0 G0	11,280	B3 U0 G0
700mA				
04	8,883	B3 U0 G0	9,225	B3 U0 G0
06	13,190	B3 U0 G0	13,697	B3 U0 G0


* Initial delivered lumens at 25°C (77°F)

** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: www.ies.org/PDF/Erratas/TM-15-11BugRatingsAddendum.pdf

SL



ITL Test Report #: 77415
CAN-304-SL-**-06-E-UL-700-40K
Initial Delivered Lumens: 12,707



CAN-304-SL-**-06-E-UL-700-40K
Mounting Height: 15' (4.6m)
Initial Delivered Lumens: 12,760
Initial FC at grade


Sparkle Petroleum Distribution				
LED Count (x10)	4000K		5700K	
	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
350mA				
04	5,055	B2 U0 G1	5,249	B2 U0 G1
06	7,506	B2 U0 G1	7,794	B3 U0 G1
525mA				
04	7,077	B2 U0 G1	7,349	B2 U0 G1
06	10,508	B3 U0 G1	10,912	B3 U0 G1
700mA				
04	8,593	B3 U0 G1	8,924	B3 U0 G1
06	12,760	B3 U0 G1	13,250	B3 U0 G1

* Initial delivered lumens at 25°C (77°F)

** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: www.ies.org/PDF/Erratas/TM-15-11BugRatingsAddendum.pdf

304 Series™ LED Recessed Canopy Luminaire

RD Mount

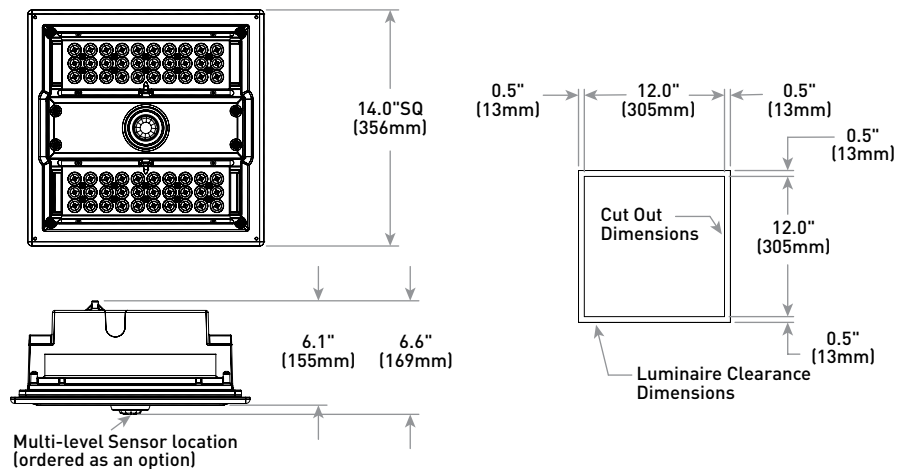

Weight

22.0 lbs. (9.9kg)