

Cree Urban Series

MODERN - LED Lantern (Post-top mounting)

Product Description

A variety of LED decorative luminaires that range from a classic, elegant design to a more essential and modern one, conceived for urban decor lighting projects. Each lantern model has a particular style optimised for day-time and nightscape appearance, featuring an easy installation mounting system. Capable of saving more than 50 percent energy compared to traditional source technologies, the Cree Urban Series luminaires also provide improved lighting quality that contributes to creating a safe and inviting site.

Applications: historic urban settings, plazas and parks, residential roadways and walkways, seafronts.


Performance Summary

NanoOptic® Precision Delivery Grid™ optic

CRI: Minimum 70 CRI

CCT: 3000K or 4000K or 5700K

Limited Warranty: 5 years on luminaire



Ordering Information												
Example: UMDAF210A30K+24BKFA901												
U	MD	A	F	210	A	30K	+	24	BK	FA9	01	
Product	Model	Version	Mounting	Optic	Input Power Designator	CCT	Insulation Class	Voltage	Color Options	Options	Cable length	
U	MD Modern	A	F Post-top	2LG Type II Long 275 Type II Short 0.75 210 Type II Short 1.0 2SH Type II Short 3SH Type III Short 3ME Type III Medium 4ME Type IV Medium 5ME Type V Medium 5SH Type V Short	A 45W	30K 3000K 40K 4000K 57K 5700K	+ Class 1 ^ Class 2	24 220-240V	BK Black	FA# Field Adjustable Output VM# Virtual Midnight	01 Exit cable 50cm (w/connector)	

* See www.cree.com/lighting/products/warranty for warranty terms

Cree Urban - MODERN - LED Lantern (Post-top mounting)

Product Specifications

LED lantern featuring a modern, versatile design. Powered by Cree technology and featuring the NanoOptic® Precision Delivery Grid™ optic system.

CONSTRUCTION & MATERIALS

- Die cast aluminum housing
- 50cm cable with quick-connector factory supplied
- Mounting system: Post-top
- Standard color: Black
- High resistance powder coating with increased anti-ageing and anti-corrosion performance
- Weight: 12kg

ELECTRICAL SYSTEM

- **Input Voltage:** 220-240V or 50/60Hz
- **Power Factor:** > 0.95 at full load
- **Total Harmonic Distortion:** < 20% at full load
- Field Adjustable Output option
- Stand-alone Virtual Midnight field programmable option
- 6 kV surge protection per EN 61000-4-5

REGULATORY & VOLUNTARY QUALIFICATIONS

- CE listed
- Risk group exempt in accordance with Standard EN 62471 for photobiological safety
- Enclosure rated IP65 per IEC 60529
- RoHS compliant

Electrical Data*		
Input Power Designator	System Watts 220-240V	Total Current
		230V
A	45	0.20

* Electrical data at 25°C (77°F)

Virtual Midnight		
Option code	Description	
VM0	38W - Virtual Midnight 24:00-06:00	38/27W
VM1	43W - Virtual Midnight 24:00-06:00	43/30W
VM2	45W - Virtual Midnight 24:00-06:00	45/32W
VM3	27W - Virtual Midnight 24:00-06:00	27/19W
VM4	29W - Virtual Midnight 24:00-06:00	29/20W
VM5	34W - Virtual Midnight 24:00-06:00	34/24W
VM6	38W - Virtual Midnight 24:00-06:00	38/19W
VM7	43W - Virtual Midnight 24:00-06:00	43/22W
VM8	45W - Virtual Midnight 24:00-06:00	45/23W


Field Adjustable Output	
Option code	Description
FA9	19W Fixed
FAA	27W Fixed
FAB	29W Fixed
FAC	34W Fixed
FAD	38W Fixed
FAE	43W Fixed
FAF	45W Fixed

Cree Urban - MODERN - LED Lantern (Post-top mounting)

Photometry

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. To obtain an IES file specific to your project consult: <http://www.cree-europe.com>.

2LG - Type II Long

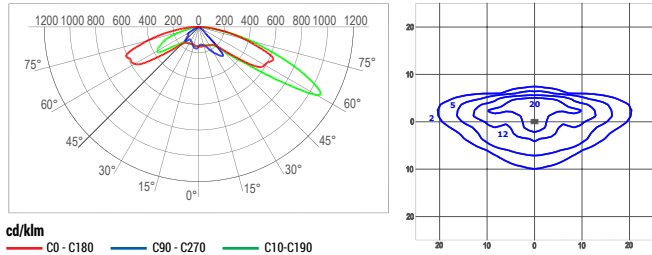


cd/klm
— C0 - C180 — C90 - C270 — C10 - C190

lux

Test Report #: 192-QL17-R10

UCRA92LGA40K
Mounting Height: 6m

275 - Type II Short 0.75

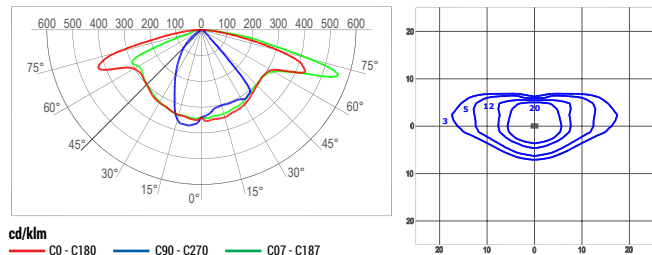


cd/klm
— C0 - C180 — C90 - C270 — C07 - C187

lux

Test Report #: 192-QL17-R08

UCRA9275A40K
Mounting Height: 6m

210 - Type II Short 1.0

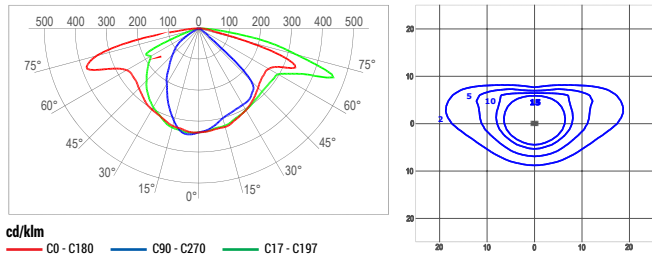


cd/klm
— C0 - C180 — C90 - C270 — C17 - C197

lux

Test Report #: 192-QL17-R01

UCRA9210A40K
Mounting Height: 6m

2SH - Type II Short

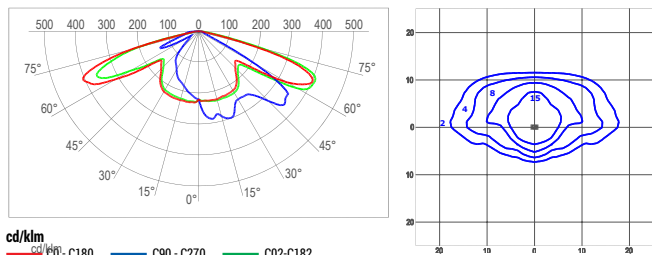

cd/klm
— C0 - C180 — C90 - C270 — C02 - C182

lux

Test Report #: 192-QL17-R09

UCRA92SHA40K
Mounting Height: 6m

Lumen Output - 2LG (Type II Long)			
Input Power Designator	5700K	4000K	3000K
	Initial Delivered Lumens*	5549	5443

* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -4 and +10% of initial delivered lumens

Lumen Output - 275 (Type II Short 0.75)			
Input Power Designator	5700K	4000K	3000K
	Initial Delivered Lumens*	5681	5572

* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -4 and +10% of initial delivered lumens

Lumen Output - 210 (Type II Short 1.0)			
Input Power Designator	5700K	4000K	3000K
	Initial Delivered Lumens*	5803	5692

* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -4 and +10% of initial delivered lumens

Lumen Output - 2SH (Type II Short)			
Input Power Designator	5700K	4000K	3000K
	Initial Delivered Lumens*	5642	5534


* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -4 and +10% of initial delivered lumens

Cree Urban - MODERN - LED Lantern (Post-top mounting)

Photometry

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. To obtain an IES file specific to your project consult: <http://www.cree-europe.com>.

3SH - Type III Short

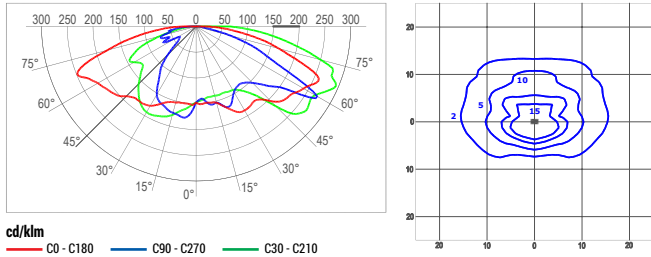

cd/klm
C0 - C180 C90 - C270 C30 - C210

lux


Test Report #: 192-QL17-R11

UCRA93SHA40K
Mounting Height: 6m

Lumen Output - 3SH (Type III Short)			
Input Power Designator	5700K	4000K	3000K
	Initial Delivered Lumens*	Initial Delivered Lumens*	Initial Delivered Lumens*
A	5277	5176	5075

* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -4 and +10% of initial delivered lumens

3ME - Type III Medium

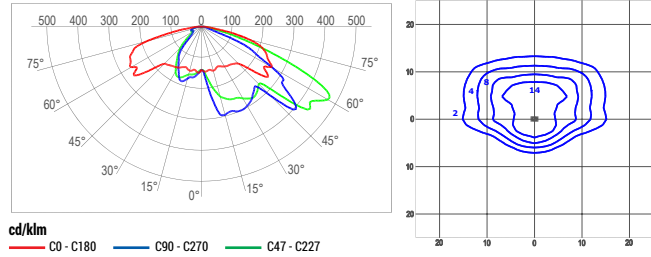

cd/klm
C0 - C180 C90 - C270 C47 - C227

lux


Test Report #: 192-QL17-R12

UCRA93MEA40K
Mounting Height: 6m

Lumen Output - 3ME (Type III Medium)			
Input Power Designator	5700K	4000K	3000K
	Initial Delivered Lumens*	Initial Delivered Lumens*	Initial Delivered Lumens*
A	5566	5459	5352

* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -4 and +10% of initial delivered lumens

4ME - Type IV Medium

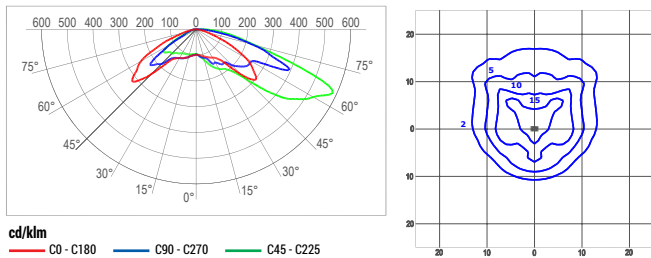

cd/klm
C0 - C180 C90 - C270 C45 - C225

lux


Test Report #: 192-QL17-R13

UCRA94MEA40K
Mounting Height: 6m

Lumen Output - 4ME (Type IV Medium)			
Input Power Designator	5700K	4000K	3000K
	Initial Delivered Lumens*	Initial Delivered Lumens*	Initial Delivered Lumens*
A	5589	5482	5375

* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -4 and +10% of initial delivered lumens

5ME - Type V Medium

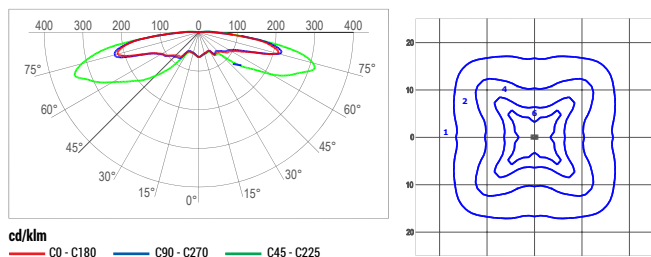

cd/klm
C0 - C180 C90 - C270 C45 - C225

lux

Test Report #: 192-QL17-R14

UCRA95MEA40K
Mounting Height: 6m

Lumen Output - 5ME (Type V Medium)			
Input Power Designator	5700K	4000K	3000K
	Initial Delivered Lumens*	Initial Delivered Lumens*	Initial Delivered Lumens*
A	4942	4710	3861



* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -4 and +10% of initial delivered lumens

Cree Urban - MODERN - LED Lantern (Post-top mounting)

Photometry

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. To obtain an IES file specific to your project consult: <http://www.cree-europe.com>.

5SH - Type V Medium

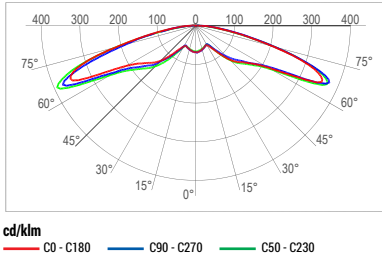

Test Report #: 192-QL17-R15

UCRA95SHA40K
 Mounting Height: 6m

Lumen Output - 5SH (Type V Medium)			
Input Power Designator	5700K	4000K	3000K
		Initial Delivered Lumens*	Initial Delivered Lumens*
A	5548	5288	4334

* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -4 and +10% of initial delivered lumens