

# Cree CXB Series

LED Low-Bay/High-Bay Luminaire

## Product Description

The CXB Series LED Low-Bay/High-Bay luminaire delivers 20,000 median and 26,000 median lumens with illumination performance to allow one-for-one replacement of 250W and 400W HID luminaires and multi-lamp fluorescent low-bay and high-bay fixtures. With exceptional rated lifetimes, zero restrike time and a compact lightweight construction, the CXB Series is a direct replacement for incumbent HID and fluorescent light sources that provides additional benefits of energy savings and significantly reduced relamp maintenance costs. The CXB Series is offered with reflector choices of aluminum, clear and white acrylic with optional bottom lenses – making it ideal for a variety of applications. The CXB Series is available with 1-10V dimming option.

**Applications:** Grocery, sport (aluminum reflector), industrial, retail and warehouse spaces.

## Performance Summary

**Delivered Light Output:** 20,000 or 26,000 median lumens

**Input Power:** 155 or 233 Watts

**CRI:** 80

**CCT:** 4000K; 5000K

**Input Voltage:** 220-240 VAC

**Limited Warranty:** 10 years on luminaire

**Controls:** ADIM (1-10V) Dimming to 5%

**Mounting:** J-Box, pendant, hook, eye bolt

**Weight:** Maximum 6.4kg

## Accessories

Reflector	
<b>Wire Guards</b> WG-A - 406mm Wire Guard for Aluminum Reflector WG-AP - 406mm Wire Guard for Acrylic Reflector	<b>Lenses</b> DL16 - 406mm Acrylic Clear Prismatic Drop Lens for Acrylic Reflector CL16 - 406mm Acrylic Clear Conical Bottom Lens for Acrylic Reflector
Light Engine	
<b>Galvanized Safety Cables</b> SC-5 - 1.5m Cable	SC-10 - 3.0m Cable

## Ordering Information



Fully assembled luminaire is composed of two components that must be ordered separately:  
 Example: **Reflector:** CXBA16N + **Light Engine:** CXB B JP M 40K 8 + UC ADIM TS

Reflector (Light Engine must be ordered separately)	
<b>CXBA16N</b> - 406mm Aluminum <b>CXBP16</b> - 406mm Clear Acrylic - Acrylic reflector is not impact resistant nor intended for use unprotected in a gymnasium	<b>CXBW16</b> - 406mm White Acrylic - Acrylic reflector is not impact resistant nor intended for use unprotected in a gymnasium

Light Engine (Reflector must be ordered separately)									
CXB	B	JP	M	40K	8	+	UC	ADIM	TS
Product	Version	Mounting	Lumen Output	Color Temp	CRI	Insulation Class	Voltage	Controls	Surge
CXB	B	<b>JP</b> J-Box or Pendant <b>EY</b> Eye bolt mount <b>HH</b> Hook mount	<b>M</b> 155W, 20,000 Median Lumens - 116 LPW <b>H</b> 233W, 26,000 Median Lumens - 103 LPW	<b>40K</b> 4000K <b>50K</b> 5000K	8 80 CRI	+ Class I	UC 220-240V	ADIM 1-10V Dimming to 5%	TS 6kV


† See [www.cree.com/lighting/products/warranty](http://www.cree.com/lighting/products/warranty) for warranty terms

Clear Acrylic Reflector w/Hook & Cord Mount

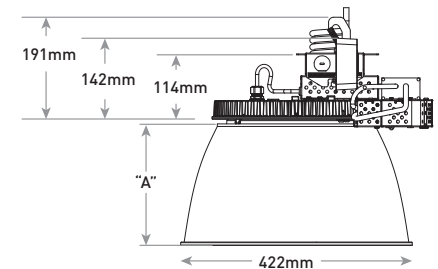


Reflector	"A" Height
CXBA16N (Aluminum)	229mm
CXBP16 (Clear Prismatic)	216mm
CXBW16 (White Acrylic)	216mm

## Drop Lens

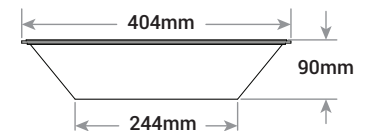

## Clear Conical Lens

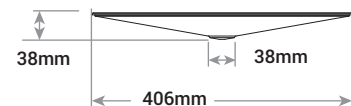

Cree CXB Series

**Product Specifications**

**CONSTRUCTION & MATERIALS**

- Die cast aluminum heatsink
- Low-profile, lightweight design provides ease of installation
- Mounting choices of direct, pendant, hook or eye mount
- HH mount is provided with spring lock hook for mounting

**OPTICAL SYSTEM**

- 406mm Anodized matte aluminum reflector
- 406mm Clear acrylic reflector
- 406mm White acrylic reflector
- LED system delivers proper uniformity & spacing

**ELECTRICAL SYSTEM**

- Integral, high-efficiency driver and power supply
- **Input Voltage:** 220-240 VAC, 50/60Hz
- **Power Factor:** > 0.9
- **Dimming:** Dimmable to 5% with Analog 1-10V
- **Total Harmonic Distortion:** < 20%
- **Surge suppression protection:** 6kV (integrated)
- **Operating Temperature Range:** 0°C / +50°C for 20,000 median lumen package; 0°C / +40°C for 26,000 median lumen package  
**WARNING:** Exceeding maximum operating temperature may result in thermal foldback


**REGULATORY & VOLUNTARY QUALIFICATIONS**

- CE listed
- RCM Approved

**Photometry**

**CXBP16/CXBB\*\*H40K8 BASED ON REPORT TEST #: PL10957-002**

Luminaire photometry has been conducted in accordance with IESNA LM-79-08. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a luminaire efficiency of 100%.

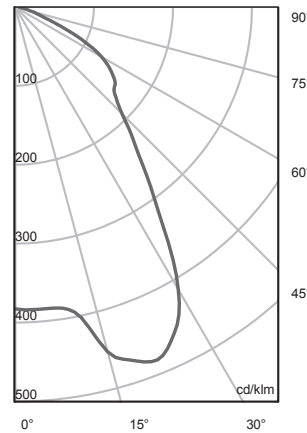

Coefficients Of Utilization - Zonal Cavity Method				
RC %:	80			
RW %:	70	50	30	10
RCR: 0	118	118	118	118
1	110	106	102	99
2	101	94	89	84
3	94	84	77	72
4	86	76	68	62
5	80	69	60	55
6	74	62	54	48
7	69	57	49	43
8	65	52	44	39
9	61	48	41	35
10	57	45	37	32

Effective Floor Cavity Reflectance: 20%

Average Luminance Table (cd/m <sup>2</sup> )			
Vertical Angle	Horizontal Angle		
	0°	45°	90°
45°	35014	35014	35014
55°	29044	29044	29044
65°	17231	17231	17231
75°	5167	5167	5167
85°	1800	1800	1800

Zonal Lumen Summary			
Zone	Lumens	% Lamp	Luminaire
0-30	10,969	N/A	37.5%
0-40	16,817	N/A	57.6%
0-60	25,135	N/A	86.0%
0-90	28,426	N/A	97.3%
0-180	29,214	N/A	100%

Reflector Uplight Illumination Performance	
Reflector	% of Uplight
CXBA16N (Aluminum)	0%
CXBP16 (Clear Acrylic)	1%
CXBP16 + CL16 (Clear Acrylic w/ Conical Bottom Lens)	5%
CXBP16 + DL16 (Clear Acrylic w/ Drop Bottom Lens)	6%
CXBW16 (White Acrylic)	16%
CXBW16 + CL16 (White Acrylic w/ Conical Bottom Lens)	20%
CXBW16 + DL16 (White Acrylic w/ Drop Bottom Lens)	19%

Recommended CXB Series Lumen Maintenance <sup>1</sup>							
Ambient	Lumen Package	Reflector	Initial LMF	25K hr Projected <sup>2</sup> LMF	50K hr Projected <sup>2</sup> LMF	75K hr Calculated <sup>3</sup> LMF	100K hr Calculated <sup>3</sup> LMF
0°C (32°F)	M, H	All	1.05	0.97	0.91	0.85	0.80
5°C (41°F)	M, H	All	1.04	0.96	0.90	0.84	0.79
10°C (50°F)	M, H	All	1.03	0.95	0.89	0.84	0.78
15°C (59°F)	M, H	All	1.02	0.94	0.88	0.83	0.78
20°C (68°F)	M, H	All	1.01	0.93	0.87	0.82	0.77
25°C (77°F)	M, H	All	1.00	0.92	0.87	0.81	0.76
30°C (86°F)	M, H	All	0.99	0.91	0.86	0.80	0.75
35°C (95°F)	M, H	All	0.98	0.90	0.85	0.80	0.75
40°C (104°F)	M, H	Aluminum	0.97	0.90	0.84	0.79	0.74
	H	Clear & White Prismatic	0.97	0.80 <sup>3</sup>	0.68 <sup>3</sup>	0.57 <sup>3</sup>	0.48 <sup>3</sup>
45°C (113°F)	M	All	0.96	0.89	0.83	0.78	0.73
50°C (122°F)	M	All	0.95	0.88	0.82	0.77	0.72

<sup>1</sup> Lumen maintenance values at 25°C are calculated per TM-21 based on LM-80 data and in-situ luminaire testing  
<sup>2</sup> In accordance with IESNA TM-21-11, Projected Values represent interpolated value based on time durations that are within six times (6X) the IESNA LM-80-08 total test duration (in hours) for the device under testing ((DUT) i.e. the packaged LED chip)  
<sup>3</sup> In accordance with IESNA TM-21-11, Calculated Values represent time durations that exceed six times (6X) the IESNA LM-80-08 total test duration (in hours) for the device under testing ((DUT) i.e. the packaged LED chip)